


MILUXOR SCHIENEN

German manufacturer of heavy duty rails, telescopic slides and linear guides



High load capacity

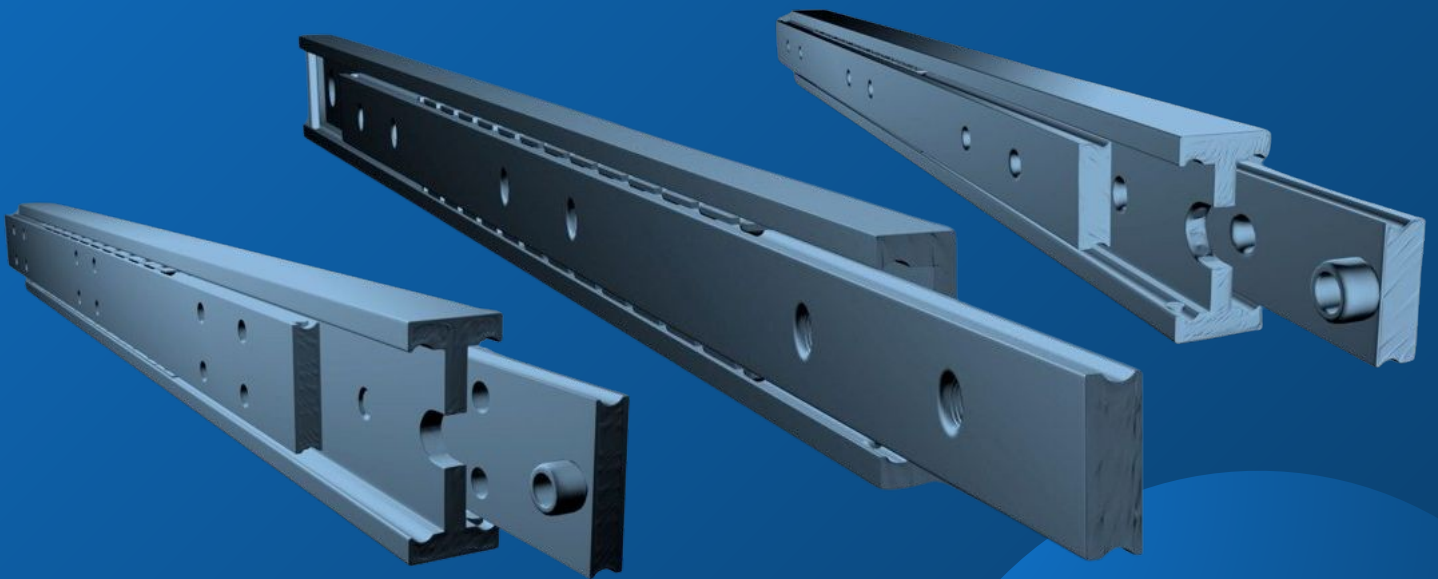

Long durability



High resistance



Low maintenance



High smooth running




Precise processing





FULL EXTRACT MX-DTP 50

The MX-DTP 50 fully extending rails offers high installation, load capacity with a small footprint.

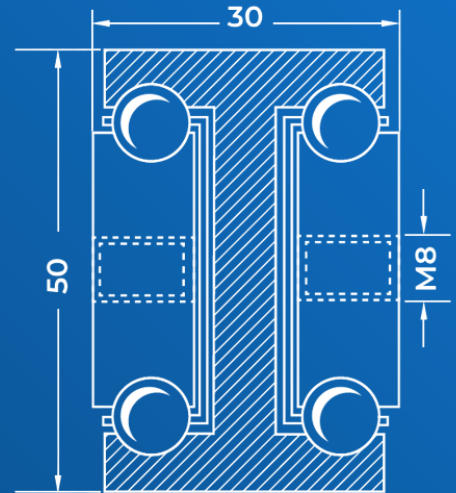

Technical Details

Load capacity Up to 400 kg per pair

Available installation length 300 up to 1.400 mm (More on request)

Bending Max. 1% per meter at full load

Operating temperature -50 °C up to 280 °C

Lifting movement Through ball cages

Corrosion protection Galvanized (C45)

Material C45 / stainless steel / aluminum

Extension length Same as installation length

Total length Installation length + extension length

Mounting 4 or 6 x M6 threaded holes

Maintenance Low maintenance


Adapted drilling pattern On request

Customized products On request





LOAD VALUES AND DRILLING PATTERN

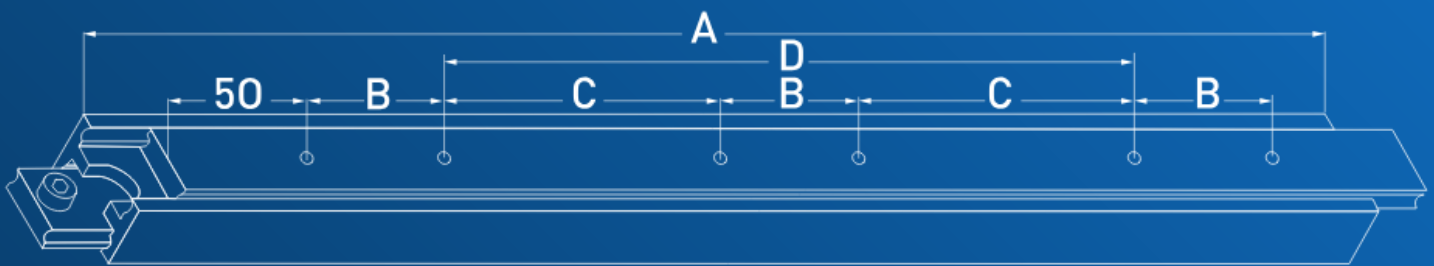

Up to an installation length of 500 mm, the centre 2 holes are omitted


MX-DTP 50 Load values table		MX-DTP 50 drilling pattern table				
Article-No.	Installation length in mm	Load in kg*	Dimensi on A	Dimensi on B	Dimensi on C	Dimensi on D
DTP50.030	300	300	300	50	---	100
DTP50.035	350	310	350	50	---	150
DTP50.040	400	320	400	50	---	200
DTP50.045	450	330	450	50	---	250
DTP50.050	500	350	500	50	---	300
DTP50.055	550	380	550	50	150	---
DTP50.060	600	400	600	50	175	---
DTP50.065	650	395	650	50	200	---
DTP50.070	700	390	700	50	225	---
DTP50.075	750	385	750	50	250	---
DTP50.080	800	380	800	50	275	---
DTP50.085	850	375	850	50	300	---
DTP50.090	900	370	900	50	325	---
DTP50.095	950	365	950	50	350	---
DTP50.100	1000	360	1000	50	375	---

* Load per pair in extended position, even weight distribution and vertical installation.





LOAD VALUES AND DRILLING PATTERN

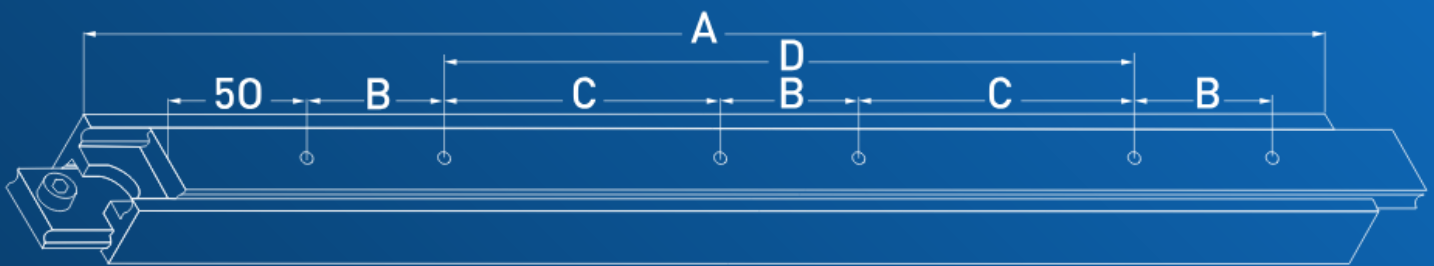

Up to an installation length of 500 mm, the centre 2 holes are omitted

MX-DTP 50 Load values table		MX-DTP 50 drilling pattern table				
Article-No.	Installation length in mm	Load in kg*	Dimensi on A	Dimensi on B	Dimensi on C	Dimensi on D
DTP50.105	1050	355	1050	50	400	---
DTP50.110	1100	350	1100	50	425	---
DTP50.115	1150	345	1150	50	450	---
DTP50.120	1200	340	1200	50	475	---
DTP50.125	1250	335	1250	50	500	---
DTP50.130	1300	330	1300	50	525	---
DTP50.135	1350	325	1350	50	550	---
DTP50.140	1400	320	1400	50	575	---

* Load per pair in extended position, even weight distribution and vertical installation.





CUSTOMISED SOLUTIONS

In addition to the standard versions, we offer customised solutions that meet your individual requirements. Our aim is to supply you with high-quality, robust and durable telescopic slides that are perfectly tailored to your specific areas of application.

Customised products

Overextract	Extension length = installation length + 50 %
Over-Overextract	Extension length = installation length + 100 %
Pull-out direction	Optional in both directions
Double-sided extract	Optionally with access barrier
Special drillings	Customisable according to your requirements

You can rely on our many years of experience and expertise in the manufacture of heavy-duty rails for a wide range of industrial applications and projects.





CONTACT UND SUPPORT

Customised offer or questions?

We are always available to help you further. Together we will find a customised solution that is precisely tailored to your requirements / project.

Contact:

Miluxor Schienen GmbH
Kruppstr. 10
36041 Fulda, Deutschland

Phone: +49(0)661 - 9 62 78 28
E-Mail: info@miluxor-schienen.de
Web: www.miluxor-schienen.de

